## 69881

# **OrbitalPLUS**

#### **FEATURES**

- 5 years (2 years + 3 years) extended warranty
- Constructed from die cast aluminium alloy & steel
- Satin nickel finish
- Anti-glare indirect light source creating a stylish clean look
- Fire rated to 30, 60 & 90 minutes
- IP65. Suitable for bathroom zone 2
- Suitable for bathroom zone 1 if used in conjunction with a 30MA RCD
- Can be covered with insulation
- IP65



#### **SPEC DATA**

Product Wattage: 9W Product Lumen: 460 Lumen/W: 51 3000K Kelvin: Energy Rating: Ε Dimmable: Yes Beam Angle: 120° CRI: 80 Lifetime (Hours): 30000 LED Type: **SMD** SDCM:


Driver Type: Constant current 200mA

Inrush Current at Start Up: 2.1A Product Voltage: 220-240V Hertz: 50/60

Operating Temp: -20 to 40 Degree Ø97mm

Cut out: Minimum Cavity Depth: 43mm Product Weight (KG): 0.215 Terminal Block: 3-way fast fix

Class:

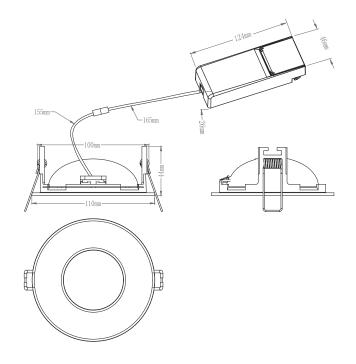

### **ACCESSORIES**

92514, Emergency LED conversion kit 101339, EM Conversation ST

101345, Dimmer module 100W universal 101346, Dimmer module 250W trailing edge

