


Unswitched Socket Outlets

- CMA030 13A 1 Gang Unswitched Socket
- CMA032 13A 2 Gang Unswitched Socket

Switched Socket Outlets

- CMA035 13A 1 Gang DP Switched Socket
- CMA036 13A 2 Gang DP Switched Socket
- CMA037 13A 2 Gang DP Switched Clean Earth Socket
- CMA630 13A 1 Gang Socket With Twin Earth Terminals
- CMA635 13A 1 Gang DP Switched Socket With Twin Earth Terminals
- CMA836 13A 2 Gang DP Switched Socket With Outboard Rockers
- CMA840 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons
- CMA836PWRD 13A 2 Gang DP Switched Socket With Outboard Red Rockers

Standards: BS 1363
 Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm² / 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)

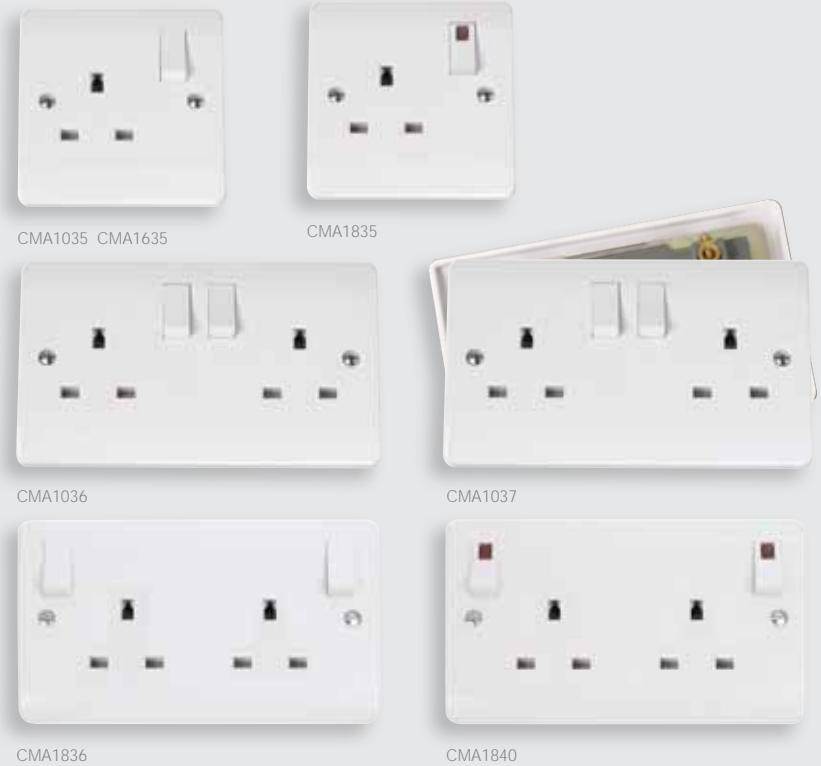

Safety Shutter Socket Outlets

- CMA1035 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
- CMA1036 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
- CMA1037 13A 2 Gang DP 3 Pin Safety Shutter Switched Clean Earth Socket
- CMA1635 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
- CMA1835 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket With Neon
- CMA1836 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers (Twin Earth)
- CMA1840 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers & Neons (Twin Earth)

Standards: BS 1363
 Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm² / 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)