


# Technical Specification

**Product Code:** GCBR066BK

**Description:** Twin Non-Isolated Coaxial Outlet

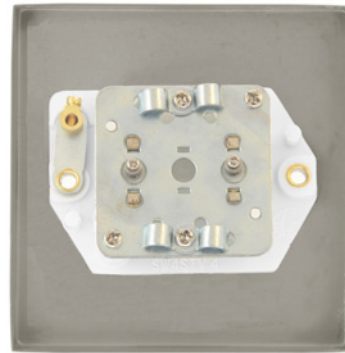

Representative Image

## General Information

<b>Dimensions</b>	88mm (W) x 88mm (H) x 8mm (D)
<b>Dimensions With Gasket</b>	91mm (W) x 91mm (H) x 9mm (D)
<b>Plate Design &amp; Finish</b>	Georgian Rope Edge Polished Cast Brass
<b>Insert &amp; Gasket Colour</b>	Black
<b>Materials</b>	Front Plate: Cast Brass Insert: Urea Earth Plate: Mild Steel Terminals: Brass Gasket: Nylon
<b>Plate Fixing Centres</b>	60.3mm
<b>Isolated</b>	Non-isolated (Direct connection to aerial where 2 way signal is required)
<b>Shielded</b>	No
<b>Ingress Protection</b>	IP20
<b>Back Box Depth</b>	16mm Minimum
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	10 Years

## Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Isolated socket will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.