


Technical Specification

Product Code: GCBR522BK

Description: 20A Ingot Double Pole Plate Switch With Optional Flex Outlet

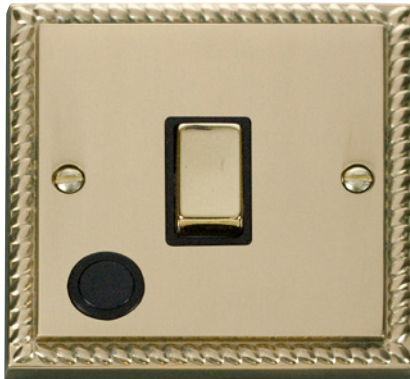

Representative Image

General Information

Dimensions	88mm (W) x 88mm (H) x 8mm (D)
Dimensions With Gasket	91mm (W) x 91mm (H) x 9mm (D)
Plate Design & Finish	Georgian Rope Edge Polished Cast Brass
Insert & Gasket Colour	Black
Materials	Front Plate: Cast Brass Insert & Housing: Urea Switch Cover: Stainless Steel Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel Gasket: Nylon
Maximum Voltage	250V~ 50Hz
Load Rating	20A
Plate Fixing Centres	60.3mm
Terminal Size	5mmø
Terminal Torque	1.8Nm
Terminal Capacity	4 x 2.5mm ²
Double Pole	Yes
Twin Earth Terminals	Yes
Flex Outlet	Yes (10mmø Through Front of the Plate)
Ingress Protection	IP20
Back Box Depth	25mm Minimum
Operational Temperature	-5°C to +40°C
Warranty	10 Years

Standards BS EN 60669-1:1999 +A1:2002 +A2:2008

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.