


DOORBELLS / CHIMES

Reliable & cost effective Door Bells & Chimes


IP20 BLACK/WHITE WIRED SURFACE MOUNTED BELL PUSHES

- Polycarbonate construction
- Interchangeable black and white covers included: flexible solution - reduced stock requirements
- Concealed fixing holes
- M.O.M: 10 / O.P.Q: 400

| Code | Version |
|-------|-------------|
| BPWB | Standard |
| BPLWB | Illuminated |




IP20 WHITE MULTI VOLTAGE BELL / CHIME TRANSFORMER

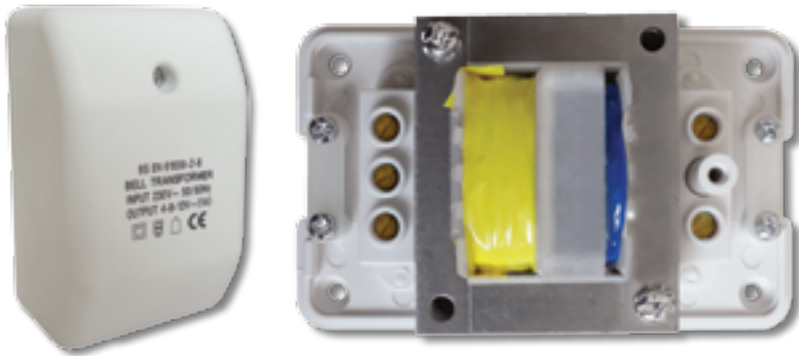

- Double insulated: no earth connection required
- 4, 8 and 12V tapings: suits most bells and chimes
- Nylon construction
- 1 Amp rated
- Thermal cut out
- M.O.M: 5 / O.P.Q: 60


| Code |
|--------|
| BT4812 |



IP20 WHITE DOOR CHIMES



| Code | Version |
|-------|----------------------|
| TCWH | Built-in Transformer |
| DC1WH | Battery Operated |



- ABS construction • Modern design
- M.O.M: 5 / O.P.Q: 20


TCWH:

- Integral transformer: neater, faster installation

DC1WH:

- Battery operation for non illuminated bell pushes
- Requires 4x 1.5V R14 'C' batteries (not included)
- Must be transformer operated for illuminated bell pushes (transformer not included - see BT4812 above)

BLACK 3 INCH DOME BELL

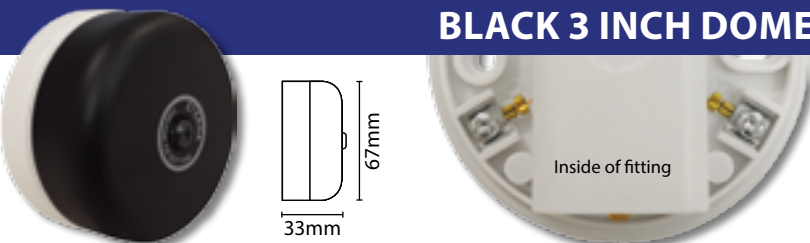

- Thermoplastic base
- Steel bell
- Transformer operated
- 8/12 volts
- The dB value typically at 1m distance is around 90dB
- M.O.M: 5 / O.P.Q: 100

| Code |
|------|
| UDB1 |

THESE PRODUCTS ARE DESIGNED FOR DOMESTIC INSTALLATION UP TO 15M RANGE