


Technical Specification

Product Code: VPSC570BK

Description: 13A Ingot 2 Gang Switched Socket Outlet With Single 2.1A USB Outlet

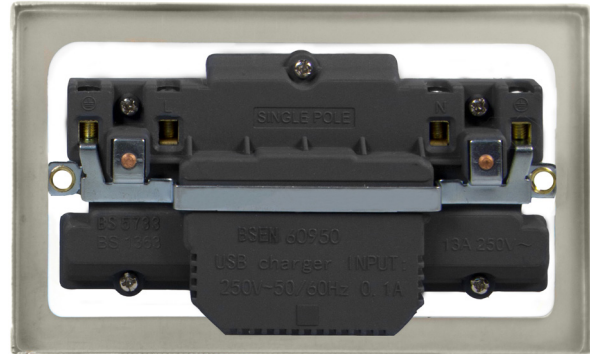

General Information

Dimensions	146mm (W) x 88mm (H) x 8mm (D)
Dimensions With Gasket	149mm (W) x 91mm (H) x 9mm (D)
Plate Design & Finish	Victorian Satin Chrome
Insert & Gasket Colour	Black
Materials	Front Plate: Stainless Steel, Insert: Urea Housing: Nylon, Switch Cover: Stainless Steel Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass, Internal Busbars: Formed Pressed Brass PCB: Mixed Components, Earth Strap: Mild Steel
Maximum Voltage	250V~ 50Hz
Load Rating	13A
Plate Fixing Centres	120.6mm
Terminal Size	5mmø
Terminal Torque	1.2Nm
Terminal Capacity	4 x 2.5mm ² or 2 x 4mm ²
Single Pole	Yes
Twin Earth Terminals	Yes
USB Charging Output Total	5V DC, 2.1A
Number Of USB Outputs	1
USB Type	USB Type "A"
USB Standby Current	2mA
Product Markings	USB 5V 2.1A
Ingress Protection	IP20
Back Box Depth	25mm Minimum
Termination Type	Screw
Operational Temperature	-5°C to +40°C
Warranty	10 Years, 1 Year Electronics
Standards	BS 1363-2: 2016 +A1: 2018 BS EN 62368-1: 2014, BS EN 62680-1-1: 2015

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

UK Design Registration: 3015621