




Electrical performance:
CEI EN 50393 as applicable
(testing under water head
of the accessory installed in a box)

Gel: UL 94-HB 

Operating temperature 

Installation temperature:
-40°C / +50°C 

Fully submersible 


Can be used underground 

IPX8
OFFICIALLY TESTED | **IMQ**

Gel Box Line

Pre-filled gel accessories for sealing, protecting and making safe electrical connections.

- To put household systems in order
- For civil and industrial connections
- Also for submersible use
- Non-toxic and with no shelf life
- Versatile and ready to use
- Designed with dimensions suitable for the most commonly used connectors
- Halogen free
- UV resistant

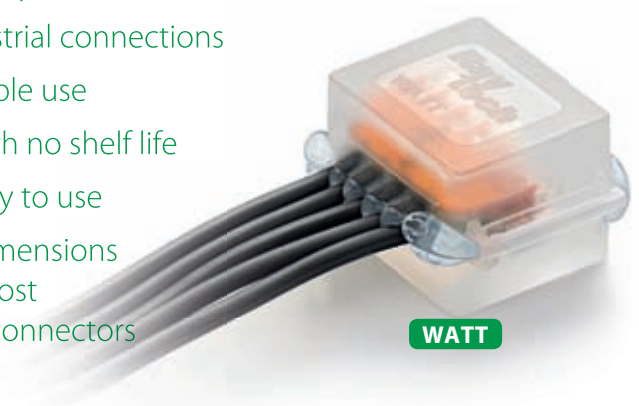

GEL BOX LINE
*a simple way
to bring indoor
connectors
outdoors*



Watt




Product	Description	Package	A x B x C (mm)
Watt	x 2 pcs	Blister	
Watt P15	x 15 pcs	Box	30 x 42 x 26
Watt MP *	x 25 pcs	Multipack	

IDEAL FOR (or similar):



Joule




Product	Description	Package	A x B x C (mm)
Joule	x 1 pcs	Blister	
Joule MP *	x 20 pcs	Multipack	33 x 52 x 26

IDEAL FOR (or similar):



Kelvin



Product	Description	Package	A x B x C (mm)
Kelvin	x 1 pcs	Blister	
Kelvin P9	x 9 pcs	Box	52 x 53 x 29
Kelvin MP *	x 20 pcs	Multipack	

IDEAL FOR (or similar):



Also available the flame retardant version in the following colours: yellow, orange, blue or black.

