


## Technical Specification

**Product Code:** VPPN052BK

**Description:** 13A Double Pole Switched Fused Connection Unit With Neon & Optional Flex Outlet

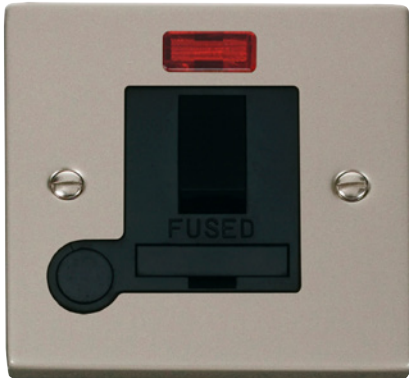

Representative Image

### General Information

Dimensions	88mm (W) x 88mm (H) x 8mm (D)
Dimensions With Gasket	91mm (W) x 91mm (H) x 9mm (D)
Plate Design & Finish	Victorian Pearl Nickel
Insert & Gasket Colour	Black
Materials	Front Plate: Stainless Steel Insert, Switch, Fuse Drawer & Housing: Urea Neon Lens: Polycarbonate Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel Gasket: Nylon
Maximum Voltage	250V~ 50Hz
Load Rating	13A
Plate Fixing Centres	60.3mm
Terminal Size	5mmø
Terminal Torque	2.5Nm
Terminal Capacity	4 x 2.5mm <sup>2</sup> or 2 x 4mm <sup>2</sup>
Switched	Yes
Double Pole	Yes
Twin Earth Terminals	Yes
Neon Indicator	Yes (Red)
Fuse Fitted	13A (BS 1362)
Flex Outlet	Yes (10mmø Through Front of the Plate)
Ingress Protection	IP20
Back Box Depth	25mm Minimum
Operational Temperature	-5°C to +40°C
Warranty	10 Years
Standards	BS 1363-4: 2016 +A1: 2018 BS 1362:1973

### Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.